Introduction to Robotics

Lecture 8

Jianwei Zhang, Lasse Einig
[zhang, einig]@informatik.uni-hamburg.de

University of Hamburg
Faculty of Mathematics, Informatics and Natural Sciences
Department of Informatics
Technical Aspects of Multimodal Systems

June 03, 2016

Outline

Introduction
Kinematic Equations
Robot Description
Inverse Kinematics for Manipulators
Differential motion with homogeneous transformations
Jacobian
Trajectory planning
Trajectory generation
Dynamics
- Forward and inverse Dynamics
- Dynamics of Manipulators

Outline (cont.)

Newton-Euler-Equation
Langrangian Equations
General dynamic equations

Dynamics of multibody systems

- A multibody system is a mechanical system of single bodies
  - connected by joints,
  - influenced by forces
- The term `dynamics` describes the behavior of bodies influenced by force
  - Typical forces: gravitation and inertia
- `kinematics` just models the motion of bodies (without considering forces), therefore it can be seen as a subset of dynamics

Forward and inverse Dynamics

We consider a force F and its effect on a body:

$$F = m \cdot a = m \cdot \dot{v}$$

In order to solve this equation, two of the variables need to be known.

Forward Dynamics

If the force F and the mass of the body m is known:

$$a = \dot{v} = \frac{F}{m}$$

Hence the following can be determined:

- velocity (by integration)
- coordinates of single bodies
- forward dynamics
- mechanical stress of bodies

Forward Dynamics (cont.)

Input

τ_i = torque at joint i that effects a trajectory Θ.
$i = 1, \ldots, n$, where n is the number of joints.

Output

Θ_i = joint angle of i
$\dot{\Theta}_i$ = angular velocity of joint i
$\ddot{\Theta}_i$ = angular acceleration of joint i

Inverse Dynamics

If the time curves of the joint angles are known, it can be differentiated twice.

This way,

- internal forces
- and torques

can be obtained for each body and joint.

Problems of highly dynamic motions:

- models are not as complex as the real bodies
- differentiating twice (on sensor data) leads to high inaccuracy

Inverse Dynamics (cont.)

Input

Θ_i = joint angle i
$\dot{\Theta}_i$ = angular velocity of joint i
$\ddot{\Theta}_i$ = angular acceleration of joint i
$i = 1, \ldots, n$, where n is the number of joints.

Output

τ_i = required torque at joint i to produce trajectory Θ.

Dynamics of Manipulators

- **Forward dynamics:**
  - *Input*: joint forces / torques;
  - *Output*: kinematics;
  - *Application*: Simulation of a robot model.
- **Inverse Dynamics**:
  - *Input*: desired trajectory of a manipulator;
  - *Output*: required joint forces / torques;
  - *Application*: model-based control of a robot.

$$\tau(t) \rightarrow \text{direct dynamics} \quad \rightarrow \mathbf{q}(t), (\dot{\mathbf{q}}(t), \ddot{\mathbf{q}}(t))$$
$$\mathbf{q}(t) \rightarrow \text{inverse dynamics} \rightarrow \tau(t)$$

Unlike kinematics, the inverse dynamics is easier to solve than forward dynamics

Dynamics of Manipulators (cont.)

Two methods for calculation:

- Analytical methods
  - based on Lagrangian equations
- Synthetic methods:
  - based on the Newton-Euler equations

Computation time

Complexity of solving the Lagrange-Euler-model is $O(n^4)$ where n is the number of joints.

$n = 6$: 66,271 multiplications and 51,548 additions.

Lagrangian equations

The description of manipulator dynamics is directly based on the relations between the kinetic and potential energy of the manipulator joints.

Here:

- Constraining forces are not considered,
- Deep knowledge of mechanics is necessary,
- High effort of defining equations,
- Can be solved by software.

Recursive Newton-Euler Method

- Determine the kinematics from the fixed base to the TCP (relative kinematics)
- The resulting acceleration leads to forces towards rigid bodies
- The combination of constraining forces, payload forces, weight forces and working forces can be defined for every rigid body. All torques and momentums need to be in balance
- Solving this formula leads to the joint forces
- Especially suitable for serial kinematics of manipulator

Influencing factors to robot dynamics

- Functional affordance
  - trajectory and velocity of links
  - load on a link
- Control quantity
  - velocity and acceleration of joints
  - forces and torques
- Robot-specific elements
  - geometry
  - mass distribution

Aim of determining robot dynamics

- Determining joint forces and torques for one point of a trajectory $(\Theta, \dot{\Theta}, \ddot{\Theta})$
- Determining the motion of a link or the complete manipulator for given joint-forces and -torques(τ)

To achieve this the mathematical model is applied.

Formulation of robot dynamics

- Combining the different influence factors in the robot specific motion equation from kinematics $(\Theta, \dot{\Theta}, \ddot{\Theta})$
- Practically the Newton-, Euler- and motion-equation for each joint are combined.
- Advantages: numerically efficient, applicable for complex geometry, can be modularized

Interim Conclusions

- We can determine the forces with the Newton-equation
- The Euler-equation provides the torque.
- **The combination provides force and torque for each joint.**

Example: A two joint manipulator

Dynamics of a multibody system, example: a two joint manipulator.

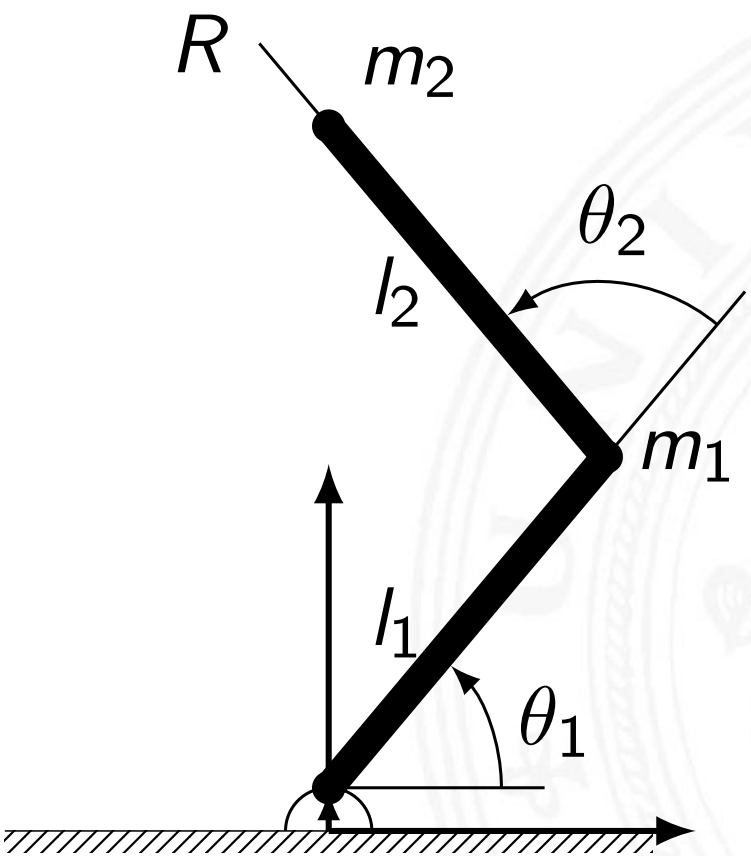

Newton-Euler-Equations for two joint manipulator

Using Newton's second law, the forces at the center of mass at link 1 and 2 are:

$$\mathbf{F}_1 = m_1 \ddot{\mathbf{r}}_1$$

$$\mathbf{F}_2 = m_2 \ddot{\mathbf{r}}_2$$

where

$$\mathbf{r}_1 = \frac{1}{2} l_1 (\cos\theta_1 \vec{i} + \sin\theta_1 \vec{j})$$

$$\mathbf{r}_2 = 2\mathbf{r}_1 + \frac{1}{2} l_2 [\cos(\theta_1 + \theta_2)\vec{i} + \sin(\theta_1 + \theta_2)\vec{j}]$$

Newton-Euler-Equations for two joint manipulator (cont.)

Euler equations:

$$\tau_1 = I_1\dot{\omega}_1 + \omega_1 \times I_1\omega_1$$

$$\tau_2 = I_2\dot{\omega}_2 + \omega_2 \times I_2\omega_2$$

where

$$I_1 = \frac{m_1 {l_1}^2}{12} + \frac{m_1 R^2}{4}$$

$$I_2 = \frac{m_2 {l_2}^2}{12} + \frac{m_2 R^2}{4}$$

Newton-Euler-Equations for two joint manipulator (cont.)

The angular velocities and angular accelerations are:

$$\omega_1 = \dot{\theta}_1$$

$$\omega_2 = \dot{\theta}_1 + \dot{\theta}_2$$

$$\dot{\omega}_1 = \ddot{\theta}_1$$

$$\dot{\omega}_2 = \ddot{\theta}_1 + \ddot{\theta}_2$$

As $\omega_i \times \mathbf{I}_i \omega_i = 0$, the forces/torques at the center of mass of links 1 and 2 are:

$$\tau_1 = I_1 \ddot{\theta}_1$$

$$\tau_2 = I_2(\ddot{\theta}_1 + \ddot{\theta}_2)$$

$\mathbf{F}_1, \mathbf{F}_2, \tau_1, \tau_2$ are used for force and torque balance and are solved for joint 1 and 2.

Lagrangian Equations

The Lagrangian function L is defined as the difference between kinetic energy K and potential energy P of the system.

$$L = K - P$$

Theorem

The motion equations of a mechanical system with coordinates $\mathbf{q} \in \Theta^n$ and the Lagrangian function L is defined by:

$$\frac{d}{dt}\frac{\partial L}{\partial \dot{q}_i} - \frac{\partial L}{\partial q_i} = F_i, \quad i = 1, \ldots, n$$

where
q_i: the coordinates, where the kinetic and potential energy is defined;
$\dot{q}_i$: the velocity;
F_i: the force of torque, depending on the type of joint (rotational or linear)

Example: A two joint manipulator

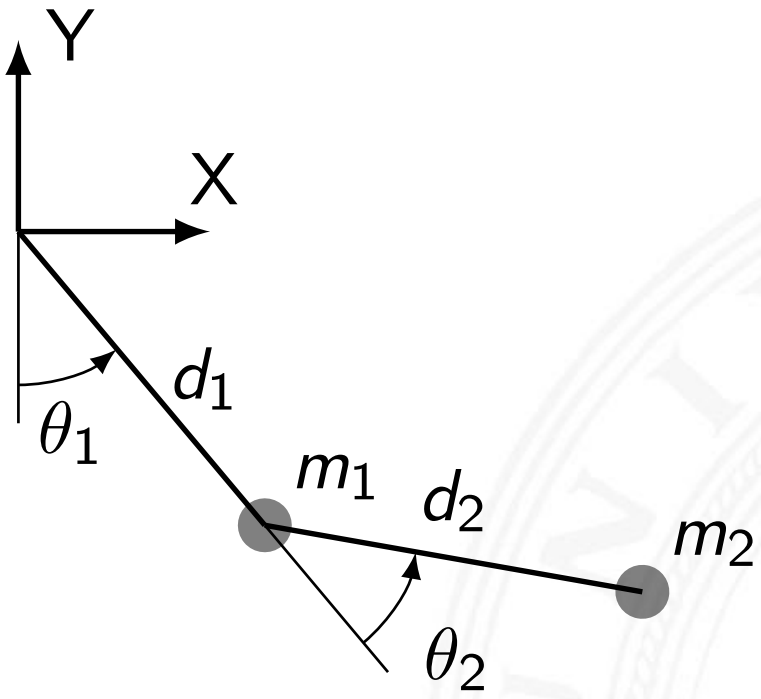

Langragian Method for two joint manipulator

The kinetic energy of mass m_1 is:

$$K_1 = \frac{1}{2} m_1 {d_1}^2 {\dot{\theta}_1}^2$$

The potential energy is:

$$P_1 = -m_1 g d_1 cos(\theta_1)$$

The cartesian positions are:

$$x_2 = d_1 sin(\theta_1) + d_2 sin(\theta_1 + \theta_2)$$
$$y_2 = -d_1 cos(\theta_1) - d_2 cos(\theta_1 + \theta_2)$$

Langragian Method for two joint manipulator (cont.)

The cartesian components of velocity are:

$$\dot{x}_2 = d_1 cos(\theta_1)\dot{\theta}_1 + d_2 cos(\theta_1 + \theta_2)(\dot{\theta}_1 + \dot{\theta}_2)$$

$$\dot{y}_2 = d_1 sin(\theta_1)\dot{\theta}_1 + d_2 sin(\theta_1 + \theta_2)(\dot{\theta}_1 + \dot{\theta}_2)$$

The square of velocity is:

$$v_2{}^2 = \dot{x_2}{}^2 + \dot{y_2}{}^2$$

The kinetic energy of link 2 is:

$$K_2 = \frac{1}{2} m_2 v_2{}^2$$

The potential energy of link 2 is:

$$P_2 = -m_2 g d_1 cos(\theta_1) - m_2 g d_2 cos(\theta_1 + \theta_2)$$

Langragian Method for two joint manipulator (cont.)

The Lagrangian function is:

$$L = (K_1 + K_2) - (P_1 + P_2)$$

The force/torque to joint 1 and 2 are:

$$\tau_1 = \frac{d}{dt}\frac{\partial L}{\partial \dot{\theta}_1} - \frac{\partial L}{\partial \theta_1}$$

$$\tau_2 = \frac{d}{dt}\frac{\partial L}{\partial \dot{\theta}_2} - \frac{\partial L}{\partial \theta_2}$$

Langragian Method for two joint manipulator (cont.)

τ_1 and τ_2 are expressed as follows:

$$\begin{aligned}\tau_1 =& D_{11}\ddot{\theta}_1 + D_{12}\ddot{\theta}_2 + D_{111}\dot{\theta}_1^2 + D_{122}\dot{\theta}_2^2 \\ &+ D_{112}\dot{\theta}_1\dot{\theta}_2 + D_{121}\dot{\theta}_2\dot{\theta}_1 + D_1\end{aligned}$$

$$\begin{aligned}\tau_2 =& D_{21}\ddot{\theta}_1 + D_{22}\ddot{\theta}_2 + D_{211}\dot{\theta}_1^2 + D_{222}\dot{\theta}_2^2 \\ &+ D_{212}\dot{\theta}_1\dot{\theta}_2 + D_{221}\dot{\theta}_2\dot{\theta}_1 + D_2\end{aligned}$$

Langragian Method for two joint manipulator (cont.)

where

D_{ii}: the inertia to joint i;

D_{ij}: the coupling of inertia between joint i and j;

D_{ijj}: the coefficients of the centripetal force to joint i because of the velocity of joint j;

$D_{iik}(D_{iki})$: the coefficients of the Coriolis force to joint i effected by the velocities of joint i and k;

D_i: the gravity of joint i.

General dynamic equations of a general manipulator

$$\tau = M(\Theta)\ddot{\Theta} + V(\Theta, \dot{\Theta}) + G(\Theta)$$

$M(\Theta)$: the position dependent $n \times n$-mass matrix of a manipulator
For the example given above:

$$M(\Theta) = \begin{bmatrix} D_{11} & D_{12} \\ D_{21} & D_{22} \end{bmatrix}$$

$V(\Theta, \dot{\Theta})$: an $n \times 1$-vector of centripetal and coriolis coefficients
For the example given above:

$$V(\Theta, \dot{\Theta}) = \begin{bmatrix} D_{111}\dot{\theta}_1^2 + D_{122}\dot{\theta}_2^2 + D_{112}\dot{\theta}_1\dot{\theta}_2 + D_{121}\dot{\theta}_2\dot{\theta}_1 \\ D_{211}\dot{\theta}_1^2 + D_{222}\dot{\theta}_2^2 + D_{212}\dot{\theta}_1\dot{\theta}_2 + D_{221}\dot{\theta}_2\dot{\theta}_1 \end{bmatrix}$$

General dynamic equations of a general manipulator (cont.)

A term like $D_{111}\dot{\theta}_1^2$ is caused by coriolis force;
A term like $D_{112}\dot{\theta}_1\dot{\theta}_2$ is caused by coriolis force and depends on the (math.) product of the two velocities.
$G(\Theta)$: a term of velocity, depends on Θ.
For the example given above:

$$G(\Theta) = \begin{bmatrix} D_1 \\ D_2 \end{bmatrix}$$